

### TECHNICAL DATA SHEET

TDS 813 / Index 09 - 16/02/2015





## **AV 33**

# PROTECTION AND CLEANING OF FIREARMS PROTECTS DE-SEIZES LUBRICATES

### **DEFINITION**

Water-repellent product with 5 primary functions: eliminates water, cleans, protects, de-seizes and lubricates.

### **ADVANTAGES**

Cleans and protects gun bores against corrosion.

Neutralises and eliminates powder combustion residues.

Extremely weak surface tension and remarkable capillarity cause AV 33 to settle underneath the water adhering to metal surfaces and form an insulating film that protects from corrosion.

AV 33 settles into the smallest cracks and de-seizes rusted and blocked mechanisms.

Re-oxidation does not occur, even in extreme corrosive environments (marine, road salt during winter months, etc.)

AV 33 lubricates without staining and without oiling. No need to grease before firing.

Protects cleaned parts for many months, whatever the storage conditions may be.

No solid additives.

### APPLICATION FIELDS

All fire-arms.

Shooting as a sport, the army, police, customs, etc.

Preventive use: Avoids any risk of "bulging" in the barrel

<u>Curative use:</u> Provides immediate protection after firing by neutralising powder combustion residues.

Cleans and lubricates the firing pin, bore, breech, muzzle, tube, trigger, reset lever, rifling, hammer, etc.

### **TECHNICAL CHARACTERISTICS**

Appearance...... homogeneous clear yellow liquid

Operating temperature..... -60°C to +200°C

#### 1/2

### Manufacturing site and registered office

Parc Industriel de la Plaine de l'Ain - 225 allée des Cèdres - 01150 Saint-Vulbas - FRANCE Tél. +33 (0)4 74 40 20 25 - Fax +33 (0)4 74 40 20 26 - www.orapi-maintenance.com



### TECHNICAL DATA SHEET

TDS 813 / Index 09 - 16/02/2015

### INSTRUCTIONS FOR USE

### DESEIZING

Spray generously on blocked parts or place blocked parts in a bath.

Wait for the product to settle between surfaces.

Unblock.

### **LUBRICATION**

Spray short bursts of product onto the mechanisms.

### **CLEANING**


Apply to the mechanisms in short bursts. AV 33 removes greasy marks and firing residues, and treats metal parts against corrosion.

### **PACKAGING**

270 ml / 150 ml aerosol ref. 4813A8 500 ml spray bottle ref. 2813i1

### **AUTHORISATIONS**

Included in SOPR@NO under code 6850-14-408-8852

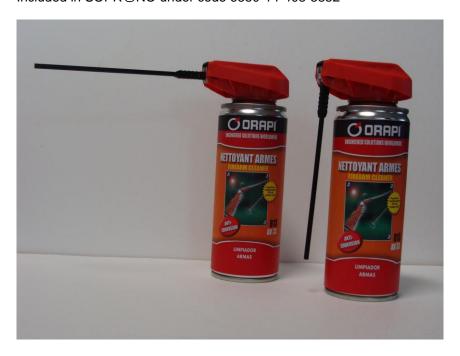

#### 2/2

### Manufacturing site and registered office

Parc Industriel de la Plaine de l'Ain - 225 allée des Cèdres - 01150 Saint-Vulbas - FRANCE Tél. +33 (0)4 74 40 20 25 - Fax +33 (0)4 74 40 20 26 - www.orapi-maintenance.com