



PROTOR PL

PEELABLE PROTECTIVE VARNISH

RED or COLOURLESS

FAST DRYING and RESISTANT FILM

DEFINITION

Red or colourless peelable protective varnish designed to protect:

Indoors and outdoors:

- parts against rust;
- spray painting booths against splattering on floors and walls;
- cutting tools during storage and transport;
- equipment and materials against radioactive contamination;
- floors and walls in industrial environments against various contaminants (grease, oil, dust etc.)
- against dust during the disposal of certain types of waste (cement, asbestos etc.)

ADVANTAGES

Easily applied (tools can be rinsed with an ORASOLV O - 514 type solvent).
Comes off quickly and easily.
The film protects polished aluminium and steel sheets against scratches and corrosion.
Compatible with ferrous and non-ferrous metal parts.
Apply at room temperature.
Extremely resistant and elastic peelable film, peels off easily.
Indoor protection: 12 months minimum.
Facilitates tool handling as cutting edges are protected.
Can be used on parts stored outdoors.
Protection against rust for shipment.

APPLICATION FIELDS

Advised for the protection of

- polished machined parts, rolling mill cylinders, tools, etc.;
- walls and windows of spray painting booths or parts not to be painted (see photos 3a, 3b and 3c)
- Store windows to hide the inside of the shop (works), against dust from waste etc.
- metal rods, T-joints, U-shaped guide rails for storage and maritime transport (in containers)
- automotive or bicycle parts, metal furniture, simple moulds for plastics etc.
- new tools against rust, scratches and knocks - photos 1a and 2a.
- material and equipment in contaminated areas of nuclear power plants.
- lifting machines and handling equipment against various projections (acids, paint etc.)

- 1/3 -

Head office

Parc Industriel de la Plaine de l'Ain - 225 allée des Cèdres - 01150 Saint-Vulbas - FRANCE
Tel. +33 (0)4 74 40 20 25 - Fax +33 (0)4 74 40 20 26 www.orapi-maintenance.com

TECHNICAL CHARACTERISTICS

Aspect	liquid
Colour	red 967 or colourless 968
Flash point (ASTM D56)	21°C
Coverage	> 8 m ² /litre approx.
Coating thickness (spray gun)	Approx. 0.1 mm
Density	0.900
Drying time	Approx. 30 minutes

INSTRUCTIONS FOR USE

Shake gently before using.

This product can be applied by immersion, with a brush or sprayed using a spray gun (with recommended pressure of 40-60 psi, approx. 2-4 bars).

Application of two thick layers is highly recommended for easier removal.

Use on clean and preferably smooth surfaces, which makes peeling easier and prevents micro-tears in the film.

Drying time can be shortened by air blowing or using a drying oven at 40°C.

All tools can be easily rinsed with ORASOLV O- 514.

PACKAGING

RED

1 liter container
20 liters drum

Ref. 2967 i2 x 12
Ref. 2967 O1 x 1

COLOURLESS

1 liter container Ref. 2968 i2 x 12





- 2/3 -

Head office

Parc Industriel de la Plaine de l'Ain - 225 allée des Cèdres - 01150 Saint-Vulbas - FRANCE

Tel. +33 (0)4 74 40 20 25 - Fax +33 (0)4 74 40 20 26 www.orapi-maintenance.com

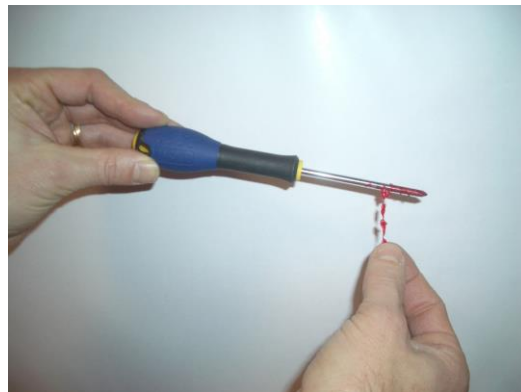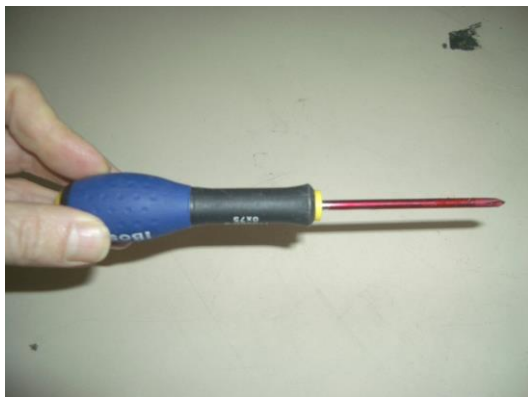

- 3/3 -

Head office

Parc Industriel de la Plaine de l'Ain - 225 allée des Cèdres - 01150 Saint-Vulbas - FRANCE
Tel. +33 (0)4 74 40 20 25 - Fax +33 (0)4 74 40 20 26 www.orapi-maintenance.com