

Series
S100



Ingenious Design for Easy Installation and Simple Operation.



Pulsarlube **S**

Features & Advantages

Innovative Design

The upward piston movement dramatically reduces grease hardening, the chronic issue of conventional spring type lubricators

More Reliable Lubrication

More reliable than other conventional spring type lubricators by minimizing the problem of oil separation

Cost Savings

Prevent plant downtime and save on manpower consumption for manual lubrication

User Friendly

- ▶ Available pre-filled and can be installed right out of the box
- ▶ Grease dispensing rate can be easily adjusted by using a control knob
- ▶ Refillable and reusable


Typical Industries and Applications



The following equipment will benefit from using the Pulsarlube S

- Ball, roller bearings
- Shield bearings
- Bronze, oilite or open bearings
- Applications where a bearing flush is necessary

Overview

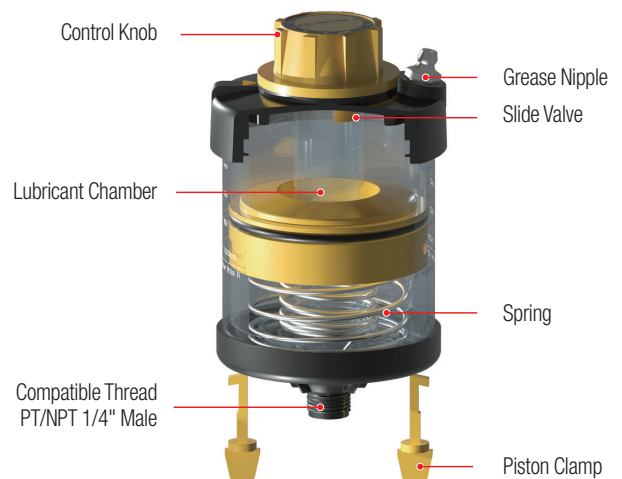

Product Specifications

Grease Pouch Capacity

100ml (refillable)

Operating Method

Spring

Operating Pressure

N/A

Operating Temperature

-23°C ~ 121°C (-9°F ~ 250°F)

Dispensing Periods

5 Dial Settings

Single Point Remote Installation

N/A

Multi-Point Installation

N/A